

# THE ALL-NEW SOLID 510 PLAYER CARD PRINTER



## It's here..



Exclusive  
**XPRESS  
CONNECT**



*Open Card Printing*

This feature allows for the Casino Staff to quickly replace a printer minimizing downtime. The Exclusive "XPress Connect Technology Key" is a swappable USB key that stores the IP Address and card format required for the AS/400 or Windows to print a card.



The SOLID-510 OC Card Printer with OpenCard Format is an Ideal Solution for Casinos and other Gaming Venues to create Player and VIP Cards, Room Keys and Employee Badges



## SOLID Series FEATURES

- ✔ Ultra-Fast Printing w/ Mag Encoding (6-7 Sec.)
- ✔ Exclusive XPress Connect Hot Swap Technology
- ✔ Ribbon Saving Technology
- ✔ Easy Front Loading of Cards and Ribbons
- ✔ Exception Card Slot for VIP Cards
- ✔ Quiet Operation
- ✔ Solid Metal Frame

### Monochrome Ribbons

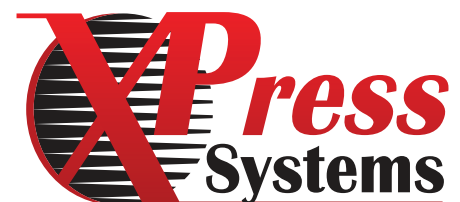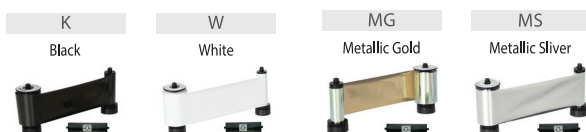

# THE ALL-NEW SOLID 510 PLAYER CARD PRINTER



- New Input Hopper with Exception Card Slot  
200 cards with cover open | 100 cards in default



- Removable -  
Output Hopper for Kiosks



- Hot-Swap Technology
- High Speed Printing
- Enhanced FINE™ Imaging Technology
- State-of-the-art CPU
- Reduced Printing Noise
- All-in-one Lock system (\*Option)
- Easy to Handle Laminate Film Cartridge

- Rear-side Stacker for Increased Speed  
(up to 100 cards, \*Option)



- Front-side Mag Encoding (\*Option)
- Support of Transparent Card
- Support CR79 Type (Factory-installed, \*Option)

\*Print Speed : May change under specific condition.

Specifications and availability may change without notice.

## SPECIFICATIONS

### PRINTING

- Print Type: Dye-Sublimation
- Print Area: Edge to Edge
- Resolution: 300dpi
- Dual Sided Printing: Option (with Flipper)

### CARD

- Card Feeding: Automatic
- Card Size: ISO CR80 or ISO CR79 (Option-Factory installed)
- Card Thickness: 0.38mm (15mil), 1.0mm (40mil)
- Card Type: PVC, PET, Composite PVC

### PRINT SPEED

- Monochrome: 5 sec./card (720 cards/hour)
- YMCKO: Front-in & Front-out : Max. 17 sec./card (212 cards/hour)  
Front-in & Back-out : Max. 16 sec./card (225 cards/hour)

### CAPACITY

- Input Hopper: 100 cards / 200 cards with cover open
- Output Hopper: Front : 40 cards / Back : 100 cards (Optional Back-side Stacker)

### SYSTEM

- Memory: 64MB RAM
- Display & Button: 2 Line LCD / 2 LED Buttons
- Supported Platforms: Microsoft Windows 7/ 8/ 10, Mac OS, Linux
- Communication: USB, Ethernet (Option)
- Power: Free Voltage (AC100/ 240V, 50~60Hz) / 48W
- Temperature/Humidity: 15~35°C / 35~70%
- Security: Physical Lock & Kensington Lock (Option)


### DIMENSIONS / WEIGHT

- Millimeter (WxLxH): 165 x 390 x 210
- Inch (WxLxH): 6.5 x 15.4 x 8.3
- Kg/lbs: 4.5 / 10

### ENCODING OPTIONS

- Magnetic: ISO7811 (Track I, II, III Read/ Write, HiCo/ LoCo), JIS II
- Contact: ISO 7816 (ID-1)
- Contactless: MIFARE, ISO 14443 (Type A/ B), ISO 15693, DESFIRE, iCLASS

### CERTIFICATIONS



Integrated by



4140 Poche Court West  
New Orleans, LA 70129  
504-254-1441  
www.benecominc.com